

KERSTAR

Part of Absolent  
Air Care Group

# OIL, COOLANT & SWarf VACUUMS



[www.kerstar.com](http://www.kerstar.com)



# OIL LINE

These vacuum cleaners are built for demanding environments and can simultaneously vacuum and pump out coolant or oil - helping companies recycle valuable fluids and save thousands of pounds.

They efficiently extract oils, coolants, swarf, and some dusts, and can discharge liquids without removing the container - streamlining operation and maintenance.

Each unit features a grated separation bucket to divide solids from liquids, and an electric float switch that stops suction at maximum liquid level for safe, reliable use.



# PRODUCTS



## OIL 140 3MP

VACUUMED MATERIAL  
Oil and Swarf

POWER AND MOTOR  
3300w / NR 3 Bypass

LIQUIDS / SOLIDS CAPACITY  
140L / 35L



## PTS 155 OIL

VACUUMED MATERIAL  
Oil and Swarf

POWER AND MOTOR  
5.5kW / Turbine

LIQUIDS / SOLIDS CAPACITY  
100L / 35L



## OIL 300 T4P

VACUUMED MATERIAL  
Oil and Swarf


POWER AND MOTOR  
4kW / Turbine

LIQUIDS / SOLIDS CAPACITY  
300L / 75L

# OIL 140 3MP

## TECHNICAL FEATURES

Vacuumed Material	Oil & Swarf	Weight	80kg
Motor	NR 3 Bypass	Filter Chamber Diameter	460mm
Power	3300W	Filter Type	Cartridge M Class Hydro-Oleophobe
Voltage	230V	First Filtration Stage	Oleophobic Sponge
Frequency	50/60Hz	Liquids Capacity	140L
AMPS	14.4A	Solids Capacity	35L
Air Flow	510 M <sup>3</sup> /H	Oil Filtration Grade	Nylon 300 $\mu$
Depression	230 mBar	Electric Floater	Yes Auto Shut Off
Suction Inlet	Type B - 60mm	Discharge System	Electric Pump
Dimensions	68x80 H152cm		

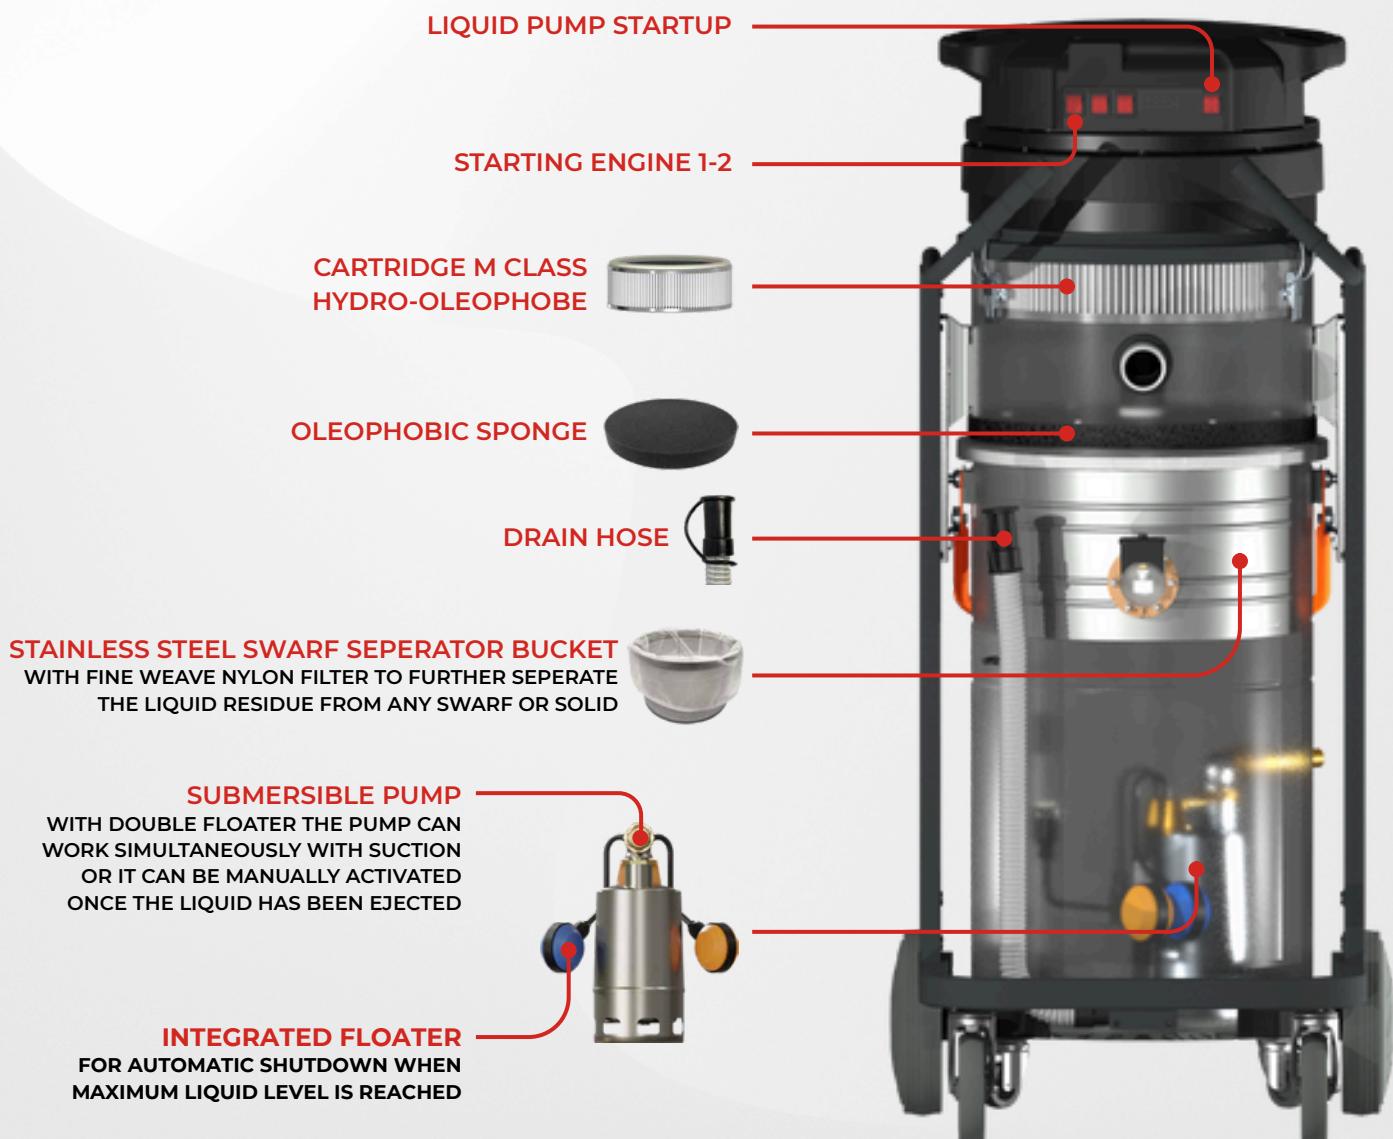

# PTS 155 OIL

## TECHNICAL FEATURES

Vacuumed Material	Oil & Swarf	Weight	151kg
Motor	Turbine	Filter Chamber Diameter	460mm
Power	5.5kW	Filter Type	Cartridge M Class
Voltage	400V	Filter Surface	13,000 cm <sup>2</sup>
Frequency	50/60Hz	Filter Cleaning	Semi-Automatic Pneu-Mechanical Shaker
AMPS	10.4A	Liquids Capacity	100L
Air Flow	320 M <sup>3</sup> /H	Electric Floater	Yes - Auto Shut Off
Depression	530 mBar	Discharge System	Reverse Flow
Suction Inlet	Type B - 60mm		
Dimensions	120x60 H125cm		




# OIL 300 T4P

## TECHNICAL FEATURES

Vacuumed Material	Oil & Swarf
Motor	Turbine
Power	4kW
Voltage	400V
Frequency	50/60Hz
AMPS	8.9 A
Air Flow	320 M <sup>3</sup> /H - 50 Hz
Depression	320 mBar - 50Hz
Suction Inlet	Type B - 60mm
Dimensions	140x80 H185cm

Weight	283kg
Filter Chamber Diameter	460mm
Filter Type	Cartridge M Class Hydro-Oleophobe
First Filtration Stage	Oleophobic Sponge
Liquids Capacity	300L to the Level 400L Tank Volume
Solids Capacity	75L & Tilting Hopper
Oil Filtration Grade	Nylon 300 $\mu$
Electric Floater	Yes - Auto Shut Off
Discharge System	Electric Pump

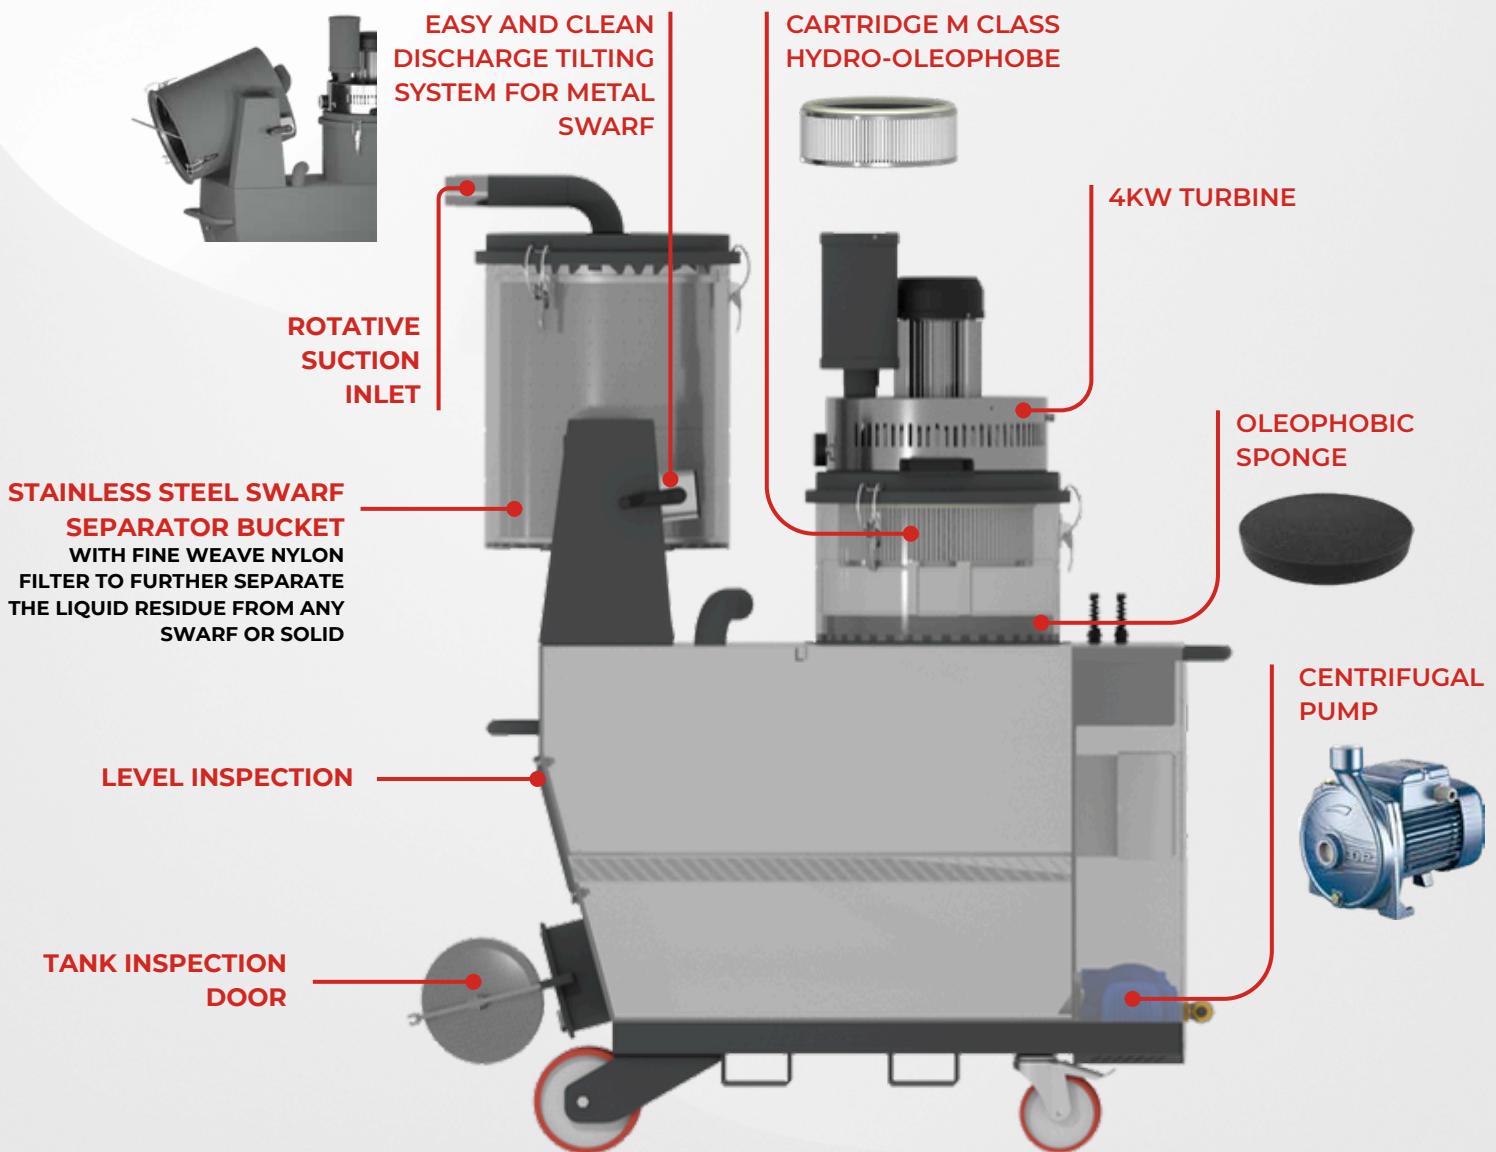





---

Part of Absolent Air Care Group

**+44 (0)1952 290500**

**[sales@filtermist.com](mailto:sales@filtermist.com)**

**[www.kerstar.com](http://www.kerstar.com)**

Coyntco industrial vacuums supplied and  
distributed by Filtermist Limited