



Part of Absolent Air Care Group



Category 2 (Dust Zone 21 / Gas Zone 1)



II 2 D Ex h IIIC T50°C Db
II 2 G Ex h IIC T6 Gb

KAV 15-45 Dry and 18-45 Wet/Dry Pick-Up Compressed Air Powered Vacuum Cleaner

Installation, Operation and Maintenance Manual

KAV Dry and W/D | Version 1.0 | Last Updated December 24, 2024
Copyright © 2024 Absolent Air Care Group AB

No part of this document may be copied or distributed without the permission of Absolent Air Care Group AB.

Table of Contents

1. Introduction	4
1.1. ATEX/UKEX Risk Assessment	4
1.2. Type H Risk Assessment	4
2. Installation, Commissioning and Handling	5
2.1. Specific Conditions of Use	5
2.2. Unpacking	5
2.3. Electrical Information	6
2.4. Commissioning	6
2.5. Carrying and Storage	7
3. Operation	8
3.1. Compressed Air Requirements	8
3.2. Filtration System	8
3.3. Access to the Float/Filtration System	9
3.4. Cleaning the Filters	9
3.5. To Set for Dry Pick-Up	9
3.6. To Set for Wet Pick-Up	9
3.7. Emptying Liquid from the Canister	10
4. KAVIT Interceptor Tank	11
5. Loss of Suction and Thermal Switch	12
5.1. Disposable Bags	12
5.2. Antistatic Cloth Filter Assembly	12
5.3. HEPA Cartridge Filter	12
6. Guarantee and Servicing	13
6.1. Guarantee	13
6.2. Servicing	13
7. Rating Plate	14
8. Spare Parts	15
9. EU Declaration of Conformity (Machinery)	19
10. EU Declaration of Conformity (ATEX)	20
11. EU Declaration of Conformity (NON-ATEX)	21

1. Introduction

Welcome to the user manual for your new Kerstar® KAV product! This manual refers to the KAV 15, KAV 18, KAV 20, KAV 30 and KAV 45 dry pick-up products, and the KAV 18 W/D, KAV 20 W/D, KAV 30 W/D and KAV 45 W/D wet or dry pick-up products.

This manual should be retained with the product for future reference. Should the product be sold or transferred to another user, always ensure that it is supplied alongside it in order that the new user can be properly acquainted with the functioning of the product, as well as any safety warnings. It is dangerous to alter the specification or modify the product in any way.

Kerstar® products are manufactured by Filtermist International Limited. If you have any enquiries, please do not hesitate to contact our team on (0) 1952 290500 or sales@filtermist.com. Further product information can be found on www.kerstar.com.

Your product is designed to pick up: non-explosive dust and debris in an unzoned atmosphere; non-explosive dust and debris in a Gas Zone 1 atmosphere (that is, an atmosphere where flammable gases, vapours and mists are likely to occur); dust and debris that may explode if ignited (Dust Zone 21) in an area where no flammable gases, vapours or mists are present or in a Gas Zone 1 atmosphere; and non-flammable and non-corrosive liquids where a Gas Zone 1 and/or Dust Zone 21 atmosphere may or may not be present (Wet/Dry pickup models only).

1.1. ATEX/UKEX Risk Assessment

If this product is used for collecting flammable/explosive materials or within a zoned area classified under the ATEX/UKEX Directive **2014/34/EU** or **Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2016: Great Britain**, then a risk assessment must be carried out by a competent person to verify the suitability of the application. This assessment will be the responsibility of the customer/end user. It should take into account, but not be limited to, the characteristics of the material being collected, such as:

- Spark ignition sensitivity (e.g., measured by minimum ignition energy (MIE)).
- Hot surface ignition sensitivity (cloud and layer) (e.g., as a function of fuel–air equivalence ratio (ϕ) and chamber pressure).
- Explosion severity (e.g., with maximum pressure (Pmax) and/or the dust constant (Kst)).
- Burning behaviour (e.g., with a Combustibility Class measurement).
- Thermal and chemical instability (e.g., thermal stability with a thermogravimetric analyzer (TGA), chemical stability using liquid or gas chromatography (HPLC – GC), mass spectrometry (MS), and infrared spectroscopy (FTIR)).
- Static electricity generation (e.g., using an electrostatic sensor).
- The ATEX/UKEX certification code for the appliance being assessed (see Rating Plate).

1.2. Type H Risk Assessment

If this product is used for collecting dust and/or debris which may be hazardous to health if inhaled, ingested or in contact with the skin, then a risk assessment must be carried out by a competent person to verify the suitability of the application. The risk assessment is the responsibility of the customer/end user and should take into account - but not be limited to - the characteristics of the material being collected, such as:

- The occupational exposure limit of the dust and debris being collected (e.g., using the COSHH standard Workplace Exposure Limits (WELs)).
- The particle size of the dust and debris being collected (e.g., using optical and condensation particle counters, and/or photometers / nephelometers).
- The method of disposal.

2. Installation, Commissioning and Handling

2.1. Specific Conditions of Use

- Outdoor use should be avoided. Take care if you use your product outdoors - and it should never be stored outdoors.
- Air compressors used to supply your product must incorporate a filter on the intake system to avoid ingress of dust or foreign material into the parts where compression takes place. They must employ only lubricants which are resistant to ignition or carbonisation within the equipment's operating temperature range.
- During use, the air supply hose should be kept away from heat, oil, sharp edges and rough surfaces. If there is a risk of the air supply hose being severed, an air fuse should be fitted - this fuse can be purchased from Kerstar® if one is required. If your air supply hose is damaged and needs replacing, it must be replaced by a conductive supply hose available from Kerstar® - do not use any other air supply hose. Doing so may invalidate your warranty.
- When collecting dust or debris that may ignite or explode, empty the cleaner after every use.
- Only Type H models are suitable for picking up hazardous dusts¹ that may endanger health.
- W/D models are not suitable for picking up flammable or corrosive liquids; always remove liquids from the container after use. For W/D models, the magnitude of vibration emissions for the machine at the hose end is below 2.5m/s².
- Dry and Type H models are designed for dry use only. If wet use is required, ensure that you have an appropriate W/D model that it is set appropriately for wet pickup.



DANGER! This product is not suitable for collecting radioactive dust, dust with an ignition energy of less than 1mJ², or pyrophoric³ or self-reactive dusts.



DANGER! Do not pick up glowing dust or other ignition hazards. When picking up swarf and similar metallic parts, the product must not be used to pick up potentially explosive dusts or be used in potentially explosive atmospheres.



DANGER! Never remove a Type H vacuum cleaner from a contaminated area unless it has been decontaminated in accordance with the "Decontamination" section in this manual.



IMPORTANT! Never use this product without the full filtration system fitted.



IMPORTANT! Do not use the product for dry vacuuming with the filters and/or microfibre bag removed.

2.2. Unpacking

Unpack the carton and ensure that you have a complete set of accessories as listed in the table below, alongside your vacuum cleaner. A/S = Antistatic/Conductive.

¹Such dusts are defined as non-radioactive, non-explosive dusts that are hazardous to health if inhaled, ingested or if in contact with the skin. A hazardous dust can be defined as very toxic, harmful, corrosive or irritant; microorganisms may be considered as dusts creating a hazard to the health of a person.

²Millijoule, equivalent to one thousandth (10⁻³) of a joule.

³Liable to ignite spontaneously on exposure to air.

Table 1. Components for KAV Dry, Wet/Dry and Type H Series Products

Component Description	Quantity
Yellow A/S Air Supply Hose	1
38mm x 3m A/S Hose Assembly	1
38mm Stainless Steel Bent Hose End	1
38mm Stainless Steel Wands	2
38 x 375mm A/S Heavy Duty Floor Tool with Brushes	1
38mm Crevice Tool A/S Plastic	1
38 x 70mm A/S Dusting Brush	1
38 x 100mm A/S Dusting Brush	1
Microfibre Bags to suit your model	5
Yellow Earth Path Continuity Certificate	1

Optional extras are available. These include:

- **Hose and Accessory Basket.** This is a zinc plated tool basket to prevent a build up of static - it can be fitted by hanging from the two horizontal crossbars on the rear of the caddy.
- **KAVIT Interceptor Tank.**

Wet/Dry pickup models can also be supplied with a Dump Valve and a 32 x 800mm Drain Hose and Stopper. These allow the emptying of liquid from the canister without removing the air motor head and float assembly.



WARNING! The dump valve or drain hose and stopper is only suitable for emptying liquids from the canister. If the dump valve or drain hose requires cleaning, a damp or wet cloth should be used - **DO NOT** use a dry cloth.

Models on a caddy (KAV 18/30/45 Dry Pickup, 18/30/45 W/D Pickup, 18/30/45 Type H Dry Pickup) are packed with the caddy handle removed for transport/packing purposes. Refit handle before use.

2.3. Electrical Information

In most KAV products, the air supply hose has a special conductive lining to dissipate any static build up down to earth. The end piece you fit must be metal and your air supply pipe system / compressed air connection point must be earthed.

It is strongly advised that the earth path continuity between the pick-up tool and the earthed air supply system be checked by a competent person at regular intervals and documentary records be kept of these checks.

2.4. Commissioning

Follow this procedure to commission your KAV Series product. Ensure that you are in possession of a 500-volt megohmmeter⁴ prior to commencing.

1. Attach the antistatic air supply hose to the air inlet port on the KAV. Do not over-tighten the connection and do not use any form of liquid thread locker or PTFE⁵ tape to seal the thread. The threaded end fitting has its own integral O ring seal. Please note, if you use liquid thread sealer or PTFE tape you may create an insulated barrier so that any static build up cannot dissipate to earth down the air supply hose.
2. To the other end of the air supply hose fit a metal (conductive) fitting to suit your air outlet sockets. Make sure the pipework and outlet fittings of your air supply system are constructed entirely of metal pipes and fittings and is earthed to your compressor.

⁴An electrical instrument used to measure the electrical resistance of insulators.

⁵Polytetrafluoroethylene, a fluoropolymer.

3. Finally, using a 500-volt megohmmeter, measure the resistance between the body of the KAV and the metal air supply pipe. The reading should be no more than 50 Megohm (MΩ) (5 x 10⁷ Ohm).



IMPORTANT! Appropriate Personal Protective Equipment (PPE) in the form of ear defenders should be worn while using this product.

This product is not intended for use by children. Where children are present, they must be supervised at all times to prevent them from playing with or using the machine in any way. Additionally, this appliance is not intended for use by persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge.

2.5. Carrying and Storage

The assembled vacuum cleaner can be moved around either by pulling the hose, using the flip/flop handle on the motor head or by means of the tubular handle (models on caddy only). It must **NOT** be dragged around by means of the power supply cable. Do not tug at the mains supply cable to remove the plug from the wall socket. When not in use, your vacuum should be disconnected from the power supply and stored indoors in a dry environment.

3. Operation

To operate your KAV, follow this procedure:

1. Connect the KAV to a suitable compressed air supply.
2. Attach the antistatic hose assembly to the canister and connect the stainless steel bent hose end and wands.
3. Choose and attach one of the antistatic tools supplied.
4. To activate your KAV, turn the lever on the control valve through **90°**. The performance of the vacuum cleaner can be controlled with the control valve, but it is advisable to fit a regulator and pressure gauge at the air outlet point of your compressed air supply.



DANGER! The maximum pressure must be no more than 120 psi⁶ (8.3 bar).

3.1. Compressed Air Requirements

The KAV range does not require the air supply to be dried or filtered. However, it is advisable to use an air supply that can be regulated so that the performance of the unit can be adjusted to suit the operator. The performance of the unit is related to the air input - the more pressure and/or volume of air input the more suction and/or induced airflow is generated.



CAUTION! Using excessive air input wastes compressed air, generates unnecessary noise and may cause implosion of the canister and/or bursting of the microfibre bags/filters (where fitted).

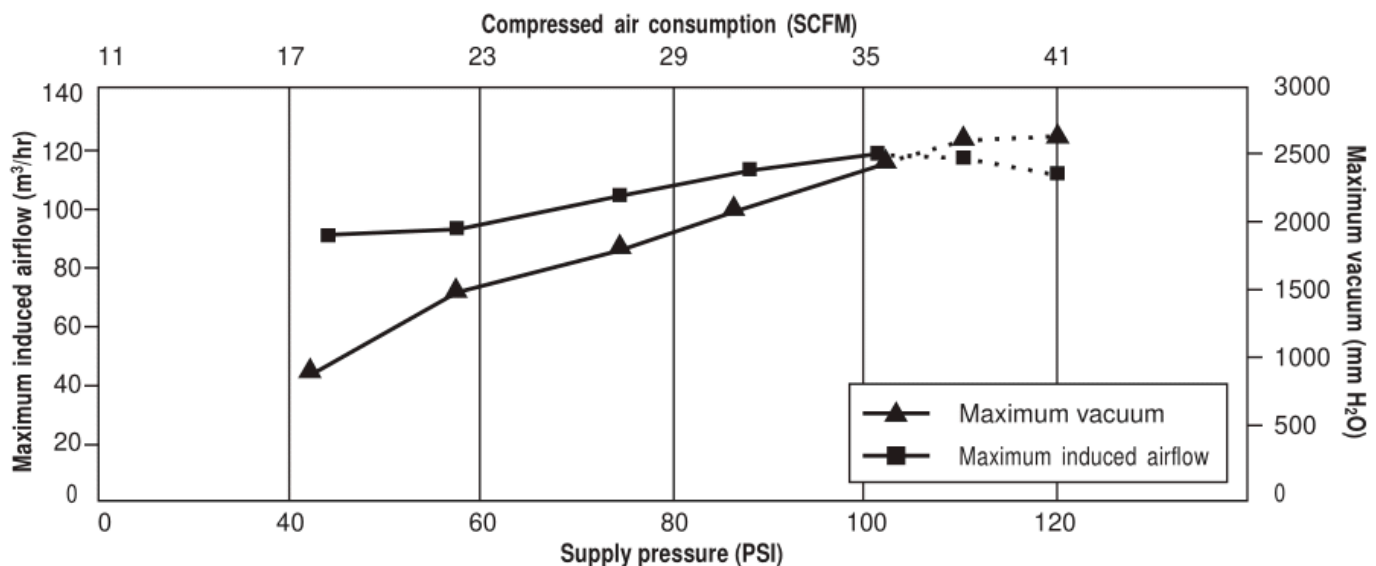


Figure 1. Compressed air requirements for KAV series models. Optimum performance is achieved at an air input pressure of 90-120psi (6.2-8.3 Bar).

3.2. Filtration System

This vacuum cleaner is fitted with two stages of filtration. Both stages are on the negative pressure (suction) side of the motor.

⁶pound per square inch. 1 psi = 0.069 bar.

- **First Stage:** K1 or K4 disposable microfibre bag. K1 and K4 disposable bags are made from microfibre material. Microfibre bags offer better filtration efficiency, greater tear resistance from sharp debris than paper bags and are less likely to burst when full of heavy dust/debris. They are fitted over the inlet inside the canister and the dust/debris is collected inside the bag. They are fitted with a moulded plastic flange and sealing cap - the cap is designed to prevent the escape of dust from the bag during the bag change and disposal process. When the bag is full or suction efficiency is impaired it should be replaced - please note that microfibre bags are not designed to be emptied and should not be reused.
- **Second Stage:** Antistatic cloth filter assembly. A conductive needlefelt cloth filtration media attached to a conductive rubber sealing ring and supported by a conductive plastic rigid filter frame.

The following information applies only to Wet/Dry (W/D) pickup models. If your model is a Dry pickup only, please disregard the following information.

3.3. Access to the Float/Filtration System

To remove the motor head, unclip all clips. Ensure that the clips are hinged clear of the rim of the motor head. Lift the motor head clear of the canister.

To refit the motor cover head align the head so that the control valve lies directly opposite the hose entry on the canister. Locate the clips over the rim of the motor head and firmly press down the clips until they have locked into position.

3.4. Cleaning the Filters

First stage microfibre bags cannot be emptied - they must be replaced when full, torn or holed. To clean the second stage antistatic cloth filter, first brush dust off the filter, then vacuum the dust off with another vacuum cleaner.

3.5. To Set for Dry Pick-Up

To set your W/D unit for dry pick-up only, follow this procedure.

1. **Remove the motor head.**
2. **Remove the float assembly.**
3. **Empty the canister of any water and dry it out with sponge or cloth.**
4. **Fit first stage disposable microfibre bag.**
5. **Fit second stage antistatic cloth filter assembly.**
6. **Refit the motor head – the machine is now ready for dry use only.**

Please note that when used for dry vacuuming, both stages of dry filtration must be used.

3.6. To Set for Wet Pick-Up

To set your W/D unit for wet pick-up only, follow this procedure.

1. **Remove the motor head.**
2. **Remove dry filter and microfibre bag.**
3. **Make sure the canister is empty and clean.**
4. **Place the float assembly in the canister.**
5. **Replace the motor head – the machine is now ready for wet use only.**

6. **When the machine is full, the float will rise automatically and cut off the suction thus preventing any more water being picked up. The machine should then be emptied.**



DANGER! Switch off and disconnect the air supply before cleaning or emptying. If foam or liquid comes from the exhaust during wet use, switch off immediately.

If liquid comes from the exhaust, foam is being generated in the canister. Follow this corrective procedure:

1. First, disconnect the air supply.
2. Then, separate the vacuum motor head from the canister and tip the liquid out of the exhaust vent until completely drained.
3. Leave the vacuum motor head in a warm and dry environment to dry out before using again.

3.7. Emptying Liquid from the Canister

To empty liquid from the canister, remove motor head and float assembly as described above. For models on a chassis (KAV 20 W/D), gently tip liquid from canister into a suitable drain, sink or toilet. For models on a caddy (KAV 18 W/D, 30 W/D and 45 W/D), as above and if required the canister can be removed from the caddy by unlocking the toggle clip situated at the rear of the canister.


If a dump valve or drain hose are fitted, disconnect the air supply and move the vacuum cleaner near to or over a suitable drain. Open the dump valve or unclip the drain hose and flip the stopper to allow the liquid to escape.

4. KAVIT Interceptor Tank

The KAVIT Interceptor Tank is an optional accessory designed to intercept dry dust or debris before it reaches your KAV. The Standard KAVIT is not designed to collect health endangering dust and debris. For this application please request a Type H KAVIT with Hepa H14 filter, The KAVIT is rated ATEX/UKEX Category 2 and is suitable for Dust Zone 21 and Gas Zone 1, when used with a Category 2 KAV 15 – 45 model.

The KAVIT is not fitted with a microfibre bag or an A/S filter assembly as the main vacuum cleaner already has these - however, it can be fitted with such if required. For W/D models, the tank is fitted with a 14" A/S float assembly - for dry pickup the A/S float assembly should be replaced with a 14" A/S sealing ring and frame without cage (optional extra).

The KAVIT Interceptor Tank is also suitable for use with KEVA models. When used with KEVA models, the KAVIT ATEX/UKEX rating reduces to ATEX/UKEX Category 3/Dust Zone 22.

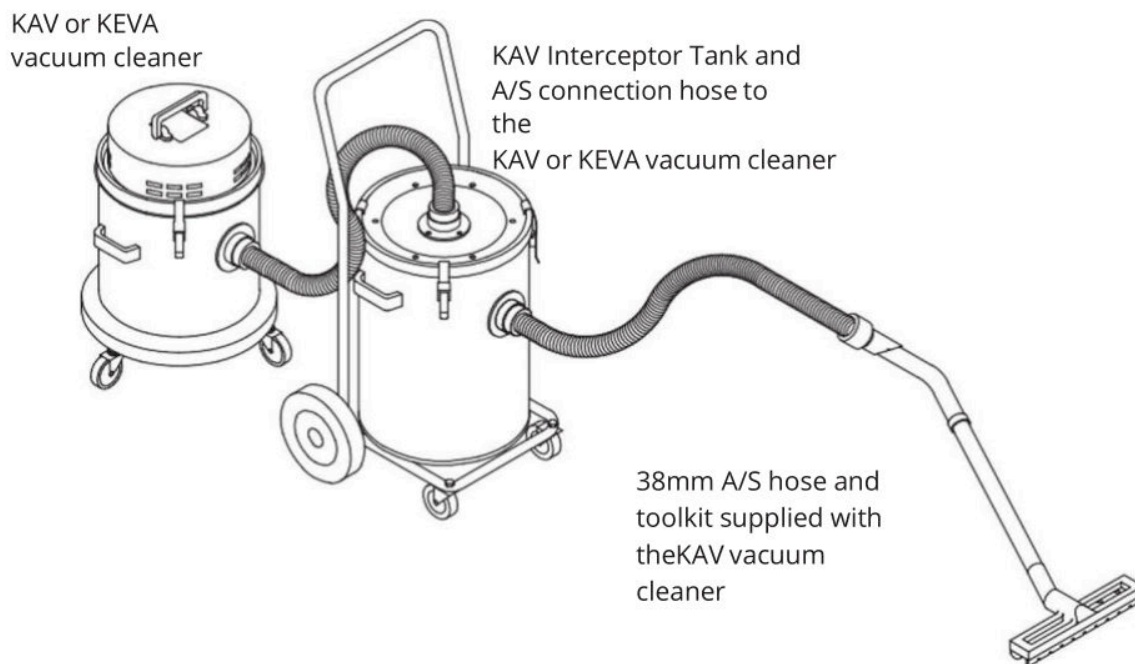

A schematic diagram of the KAVIT interceptor tank, showing how it connects to your KAV or KEVA unit.

5. Loss of Suction and Thermal Switch

If your vacuum cleaner loses suction power, first check that the hose and other accessories in use are not blocked. To clear a blockage, insert a long object into the nozzle connector to clear the airway.

If the hose or accessories are not blocked, check that the filtration system itself is not blocked. The different aspects of the system can be serviced as follows.

5.1. Disposable Bags

If the bag is full, replace. If it is burst, clean out the canister by vacuuming it with another vacuum cleaner (ensure that this is rated **ATEX/UKEX Category 3/Dust Zone 22**) and replace the bag. Suction should now be restored if a full or burst bag was the cause of the loss of suction.

5.2. Antistatic Cloth Filter Assembly

The filter assembly will become contaminated with dust during normal use and/or if the disposable bag is holed or burst. The dust must be removed, either by brushing off, or preferably by vacuuming with another vacuum (ensure that this is rated **ATEX category 3/Dust Zone 22**).

It is advisable to have a spare filter - this can be placed in the machine which can then be used to vacuum the dust off the contaminated filter, after which it becomes the spare. If any of the filters or microfibre bags are damaged or holed they must be replaced with new items.

5.3. HEPA Cartridge Filter

The HEPA cartridge is only found in certain product lines.

The HEPA cartridge is neither reusable nor cleanable and it should be disposed of safely. When it becomes excessively clogged and the vacuum performance of the appliance suffers or is no longer acceptable, fit a new cartridge.

Be careful when handling and fitting HEPA cartridges; damage to the pleated element and/or seals will affect the performance and may cause a leakage through the filter of unfiltered air. If the **thermal switch** activates to protect the motor first check the hose, tools and filtration system as described above. If these are clear and not blocked, the inlet cooling air HEPA filter may be clogged; this can be replaced by removing the cover for the inlet cooling air HEPA filter.

6. Guarantee and Servicing

6.1. Guarantee

All Kerstar® products are guaranteed for 12 months against defective parts and workmanship, excluding parts subject to normal wear and tear. Please note that there are certain conditions that may invalidate this guarantee:

- Not adhering to the instructions provided in this manual. This appliance must be correctly installed and used in accordance with these instructions.
- The use of unauthorised personnel for servicing, repair or modification of the appliance.



WARNING! Under no circumstances should you attempt to repair this appliance yourself. **Repairs undertaken by unauthorised or inexperienced persons may cause injury and/or serious malfunctioning.** This appliance must only be serviced by authorised Kerstar® personnel or distributors. Only genuine Kerstar® spare parts should be used.

We may introduce modifications to our products from time to time and consequently the details given in this user manual are subject to alteration without notice.

6.2. Servicing

Should your Kerstar® product require servicing, spares or repairs, please contact us on (+44) 1952 290500. Please make a note of the model and serial number before contacting us.

Before attempting any servicing of Type H appliances, decontaminate as described in this user manual and make sure you are protected from any dust which may still be present on or around the machine or any dust which may have collected on internal components.

Ensure that only the hose and accessories provided with the product are used. For ATEX rated products these have been ATEX/UKEX tested and assessed as suitable for use with the product. A wider range of ATEX/UKEX approved nozzles is available from Kerstar®. Disconnect all models from the electrical supply before carrying out maintenance.



7. Rating Plate


Every Kerstar® product is fitted with a Rating Plate that contains important information pertaining to your product. The rating plate may contain the following information:

Information	Meaning
Manufacturer Name and Address	The details of the manufacturer of the product.
Model or Type Number	The specific model of your product (e.g., KAV 20H).
Year of Manufacture, Assembly or Construction	The year that your product was manufactured.
CE	A mark certifying compliance with European Union regulations, standing for "Conformité Européenne".
UK CA	A mark certifying compliance with United Kingdom regulations, standing for "United Kingdom Conformity Assessed".
Ex	The distinctive community mark showing a product is suitable for use in an explosive dust and/or gas atmosphere.
II	Equipment Group II (Surface Industries)
3	Category 3 product
2	Category 2 product
G	Explosive gas, vapour or mist atmosphere
h	Mechanical equipment according to EN 80079-36
Tc	Level of protection for electrical equipment (for EPL Dc)
IIIC	Conductive dusts
T100°C	Surface temperature less than 100°C for dust evaluation
D	Explosive dust atmosphere
Dc	IECEx Equipment Protection Level
Ta = 0°C to +30°C	Suitable for use in an ambient temperature range of 0°C to +30°C
IP6X Dust tight (electrical compartment)	No ingress of dust
Weight	Weight of the unit
KEVA	Acronym for "Kerstar Electric Vac Atex"
Ex h	Protection concept – constructional safety (applies to the mechanical parts of the vacuum cleaner)
IIIC T50°C Dc	IIIC dust group – conductive dust (T50°C surface temperature for dust evaluation less than 50°C) (Dc dust atmosphere EPL (Equipment Protection Level) Zone 22)
IIC T6 Gc	IIC gas group. Suitable for group II gases, vapours and mists (e.g., Hydrogen). T6 surface temperature classification for gases, vapours and mists less than 85°C. Gc gas atmosphere EPL (Equipment Protection Level) Zone 2.
Serial Number	For example 17H 123 – made in August 2017 number 123
X	Refer to instruction book for special operating or user information
ATEX Cert No. EMT17ATEX0050X	The product has been tested and approved by an independent test house.
UKEX Cert No. EMA21UKEX0068X	The product has been tested and approved by an independent test house.
Technical File Ref KAV15 – 45	The technical file is lodged at Element Materials Technology Ltd.



8. Spare Parts

The following tables detail spare parts for KAV Dry and W/D models.

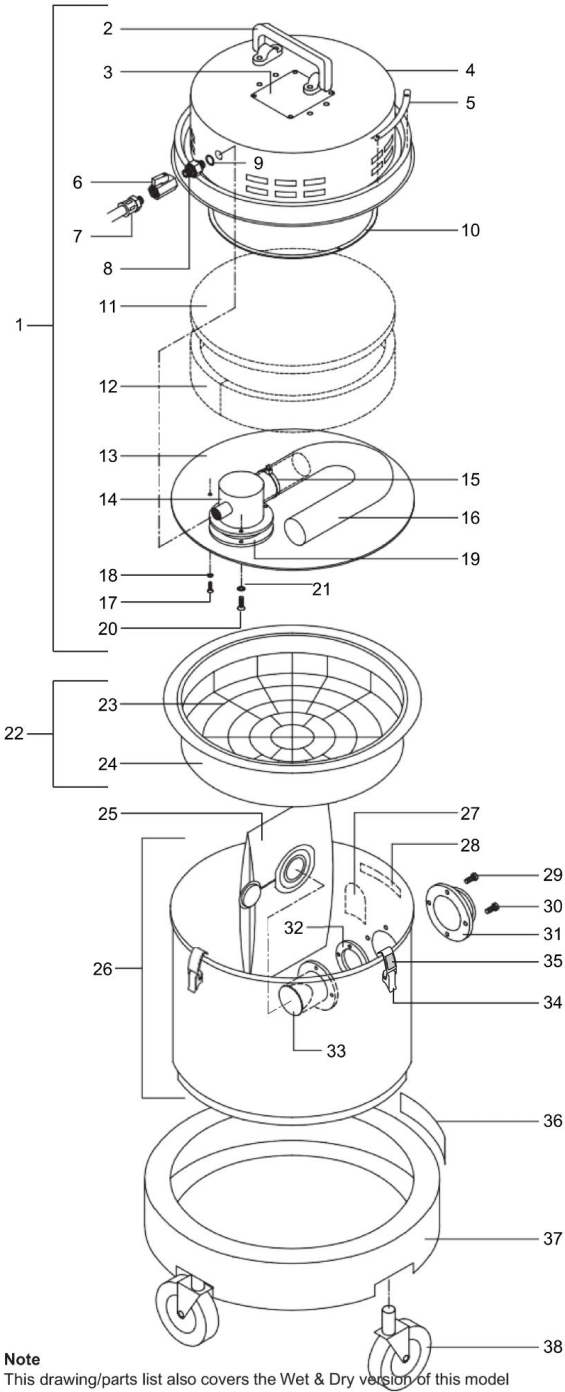

Note
This drawing/parts list also covers the Wet & Dry version of this model

^aA/S = Anti-static / Conductive

Table 2. Spare Parts for KAV 15

Item	Quantity	Description	Part Number
1	1	KAV 15 Motor Head and Air Supply Hose	25-204-20-815
2	1	A/S ^a Flip Flop Handle Assembly	25-215-10-068
3	1	KAV 15-45 Rating Plate	25-216-10-025
4	1	KAV 15 and 18 Top Pressing	25-204-10-485
5	1	Earth Strip Curved	25-204-10-531
6	1	Ball Valve	25-215-10-072
7	1	Air Supply Hose A/S 5 Metre	25-204-10-490
8	1	1/4 BSP Male to Male Nipple	25-204-10-1607
9	2	Soft Metal Washer	25-215-10-074
10	1	800 x 4 x 6mm Foam Rubber Seal	25-325-10-025
11	1	Foam Silencing KAV 15/18 Top	25-320-10-017
12	1	Foam Silencing KAV 15-45 Side	25-320-10-031
13	1	KAV 15 and 18 Motor Plate	25-204-10-486
14	1	Air Motor	25-217-10-056
15	1	Tyrap for Sound Attenuation Hose	25-215-10-075
16	1	330 x 40mm Sound Attenuation Hose	25-320-10-006
17	4	M4 x 12 Pan Pozi Screw	25-215-10-094
18	4	M4 Shakeproof Washer	25-215-10-102
19	1	Gasket for Air Motor	25-325-10-027
20	3	M5 x 16 Pan Pozi Screw	25-215-10-124
21	3	M5 Shakeproof Washer	25-215-10-150
22	1	12" A/S Filter Assembly	25-712-20-014
23	1	12" A/S Filter Frame	25-204-10-385
24	1	12" A/S Filter Cloth	25-712-10-032
25	1	K1 Microfibre Bag	25-712-10-007
26	1	KAV 15 Can Assembly	25-204-20-922
27	1	Zone 1/21 Warning Label	25-216-10-063
28	1	ATEX/UKEX Category 2 Black on Yellow Label	25-216-10-059
29	2	M5 x 20 Pan Pozi S/Steel Screw	25-215-10-145
30	2	M5 x 16 Pan Pozi S/Steel Screw	25-215-10-144
31	1	Hose Entry Spigot Outer A/S	25-204-10-255
32	1	Spigot Retainer for KAV	25-204-10-253
33	1	KAV S/Steel Deflector	25-204-10-1886
34	3	Clip for Max, Prima, KV5, 10, 15 & 18	25-215-20-004
35	1	Clip Here Yellow Label 16 x 25mm	N/A - In House Printed Label Now Used
36	N/A	N/A	N/A
37	1	KAV15 A/S Chassis (No Castors)	25-204-10-1226
38	4	75mm A/S Push In Castor	25-215-10-012

^aA/S = Anti-static / Conductive

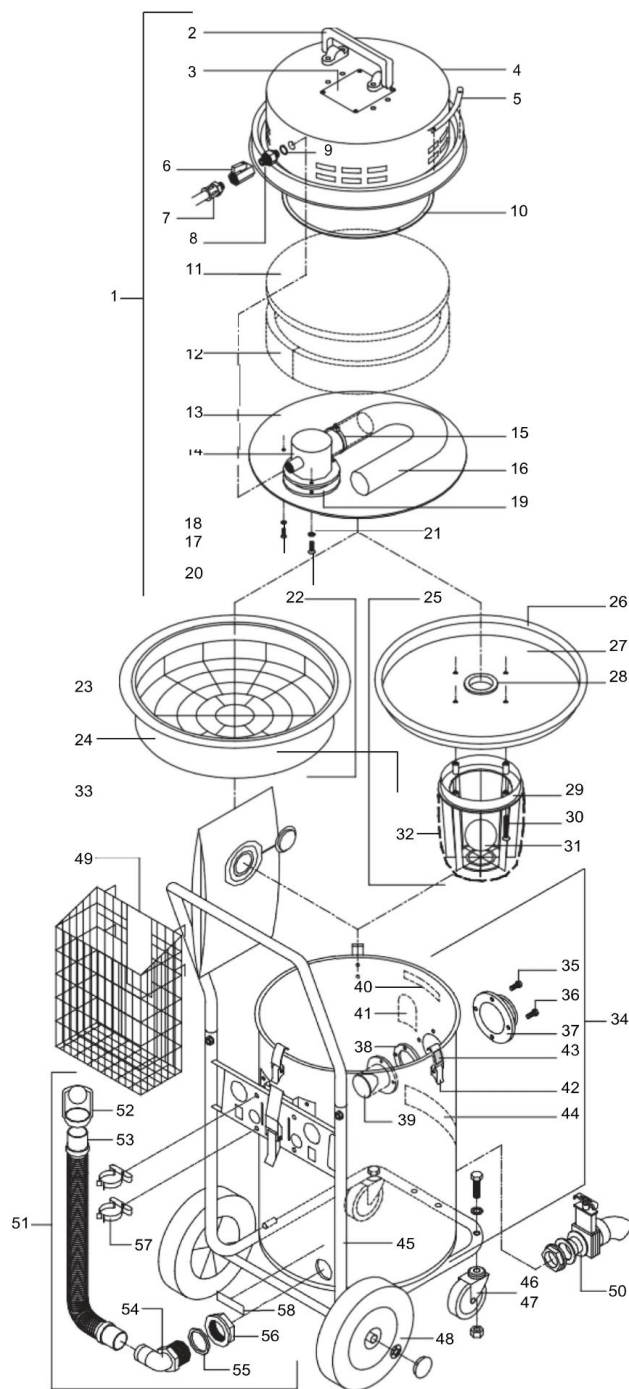


Table 3. Spare Parts for KAV 18

Item	Quantity	Description	Part Number
1	1	Motor Head and Air Supply Hose	25-204-20-826 (Dry) 25-204-20-830 (W/D)
2	1	A/S ^a Flip Flop Handle Assembly	25-215-10-068
3	1	Rating Plate	25-216-10-025 (Dry) / 25-216-10-026 (W/D)
4	1	15 /18 Top Pressing	25-204-10-485
5	1	Earth Strip Curved	25-204-10-531
6	1	Ball Valve	25-215-10-072
7	1	Air Supply Hose A/S 5 Metre	25-204-10-490
8	1	1/4 BSP Male to Male Nipple	25-204-10-1607
9	2	Soft Metal Washer	25-215-10-074
10	1	800 x 4 x 6mm Foam Rubber Seal	25-325-10-025
11	1	Foam Silencing KAV 15/18 Top	25-320-10-017
12	1	Foam Silencing KAV 15-45 Side	25-320-10-031
13	1	KAV 15 and 18 Motor Plate	25-204-10-486
14	1	Air Motor	25-217-10-056
15	1	Tyrap for Sound Attenuation Hose	25-215-10-075
16	1	330 x 40mm Sound Attenuation Hose	25-320-10-006
17	4	M4 x 12 Pan Pozz Screw	25-215-10-094
18	4	M4 Shakeproof Washer	25-215-10-102
19	1	Gasket for Air Motor	25-325-10-027
20	3	M5 x 16 Pan Pozz Screw	25-215-10-124
21	3	M5 Shakeproof Washer	25-215-10-150
22	1	12" A/S Filter Assembly	25-712-20-014
23	1	12" A/S Filter Frame	25-204-10-385
24	1	12" A/S Filter Cloth	25-712-10-032
25	1	12" A/S Float Assembly	25-204-20-309
26	1	12" A/S Sealing Ring for Float	25-325-10-004
27	1	12" A/S Float Plate	25-204-10-396
28	1	Seal for 70mm Ball Float	25-325-10-014
29	1	Float Cage A/S	25-204-10-391
30	4	No8 x 45 Self Tap S/Steel Screw	N/A
31	1	70mm Ball Float	25-204-10-1324
32	1	Net Filter	25-712-10-064
33	1	K4 Microfibre Bag	25-712-10-008
34	1	Can Assembly	25-204-20-926
35	2	M5 X 20 Pan Pozz S/Steel Screw	25-215-10-125
36	2	M5 x 16 Pan Pozz S/Steel Screw	25-215-10-124
37	1	Hose Entry Spigot Outer A/S	25-204-10-255
38	1	Spigot Retainer	25-204-10-253
39	1	S/Steel Deflector	25-204-20-187
40	1	ATEX/UKEX Category 2 Black on Yellow Label	25-216-10-059
41	1	Zone 1/21 Warning Label	25-216-10-063
42	3	Clip for Max, Prima, KV5, 10, 15 & 18	25-215-20-004
43	1	Clip Here Yellow Label 16 x 25mm	In House Printed Label Now Used
44	N/A	N/A	N/A
45	1	KAV18 Caddy Assembly S/Steel (with A/S Wheels and Castors)	25-204-20-109
46	1	75mm A/S Castor Unbraked	25-215-10-016
47	1	75mm A/S Castor Braked	25-204-10-1426
48	2	200mm A/S Wheel	25-215-10-474
49	1	KAV/KEVA (18, 30 and 45) Hose and Accessory Basket	25-204-10-351
50	1	Dump Valve Assembly and Warning Label (Optional Extra KAV18, 30 AND 45 W/D)	N/A - No BOM All Parts Sold Separately
51	1	Drain Hose Kit for KAV18, 30 and 45 W/D (Optional Extra)	25-204-20-1105
52	1	32mm Hose Stopper	25-204-10-434
53	1	32 x 800mm Drain Hose	25-204-20-1104
54	1	Elbow for 32 x 800mm Drain Hose	25-215-10-046 (BEA- CON)
55	1	Gasket for Elbow	25-325-10-015
56	1	Plastic Nut for Drain Hose Elbow	25-215-10-047
57	2	Hose Clip KV100	25-215-10-056 (BEA- CON)
58	1	Caution Label for Drain Hose / Dump Valve on KAV18, 30 and 45 W/D	In House Printed Label

^aA/S = Anti-static / Conductive

^aA/S = Anti-static / Conductive

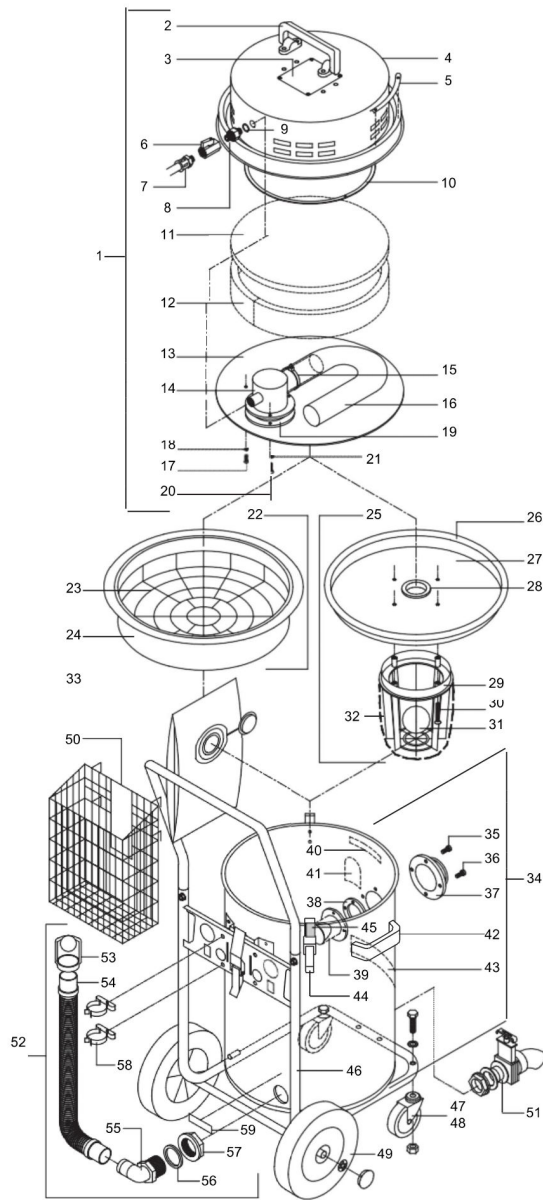



Table 5. Spare Parts for KAV 30 and 45

Item	Quantity	Description	Part Number
1	1	Motor Head and Air Supply Hose	25-204-20-850 (KAV 30) / 25-204-20-862 (KAV 45) / 25-204-20-854 (30 W/D) / 25-204-20-866 (45 W/D)
2	1	A/S ^a Flip Flop Handle Assembly	25-215-10-068
3	1	KAV 15-45 Rating Plate	25-216-10-025
		KAV 18-45 W/D Rating Plate	25-216-10-026
4	1	KAV 20-45 Top Pressing	25-852-10-026
5	1	Earth Strip Curved	25-204-10-531
6	1	Ball Valve	25-215-10-072
7	1	Air Supply Hose A/S 5 Metre	25-204-10-490
8	1	1/4 BSP Male to Male Nipple	25-204-10-1607
9	2	Soft Metal Washer	25-215-10-074
10	1	850 x 4 x 6mm Foam Rubber Seal	25-325-10-026
11	1	Foam Silencing KAV 20-45 Top	25-320-10-030
12	1	Foam Silencing KAV 15-45 Side	25-320-10-031
13	1	KAV 20-45 Motor Plate	25-204-10-530
14	1	Air Motor	25-217-10-056
15	1	Tyrap for Sound Attenuation Hose	25-215-10-075
16	1	500 x 40mm Sound Attenuation Hose	25-320-10-006
17	4	M4 x 12 Pan Pozz Screw	25-215-10-094
18	4	M4 Shakeproof Washer	25-215-10-102
19	1	Gasket for Air Motor	25-325-10-027
20	3	M5 x 16 Pan Pozz Screw	25-215-10-124
21	3	M5 Shakeproof Washer	25-215-10-150
22	1	14" A/S Filter Assembly	25-712-20-015
23	1	14" A/S Filter Frame	25-204-10-387
24	1	14" A/S Filter Cloth	25-712-10-033
25	1	14" A/S Float Assembly	25-204-20-312
26	1	14" A/S Sealing Ring for Float	25-325-10-010
27	1	14" A/S Float Plate	25-204-10-399
28	1	Seal for 70mm Ball Float	25-325-10-014
29	1	Float Cage A/S	25-204-10-391
30	4	No8 x 45 Self Tap S/Steel Screw	N/A
31	1	70mm Ball Float	25-204-10-1324
32	1	Net Filter	25-712-10-064
33	1	K4 Microfibre Bag	25-712-10-008
34	1	KAV30 Can Assembly	25-204-20-966
		KAV45 Can Assembly	25-204-20-1005
35	2	M5 x 20 Pan Pozz S/Steel Screw	25-215-10-145
36	2	M5 x 16 Pan Pozz S/Steel Screw	25-215-10-144
37	1	Hose Entry Spigot Outer A/S	25-204-10-255
38	1	Spigot Retainer for KAV	25-204-10-253
39	1	KAV S/Steel Deflector	25-204-20-187
40	1	ATEX/UKEX Category 2 Black on Yellow Label	25-216-10-059
41	1	Zone 1/21 Warning Label	25-216-10-063
42	2	A/S Curved Surface Handle with Screws and Washers	25-215-10-528
43	1	Kerstar Red/Silver Label	25-216-10-094
44	2	KV20-110 Clip for Metal Head	25-215-10-031
45	1	Clip Here Yellow Label 23 x 34mm	25-216-10-056
46	1	KAV/KEVA 30 and 45 Caddy Assembly S/Steel (with A/S Wheels and Castors)	25-204-20-1098
47	1	75mm A/S Castor Unbraked	25-215-10-016
48	1	75mm A/S Castor Braked	25-204-10-1426
49	2	200mm A/S Wheel	25-215-10-474
50	1	KAV/KEVA Hose and Accessory Basket	25-204-10-351
51	1	Dump Valve Assembly and Warning Label (Optional Extra KAV18, 30 and 45 W/D)	N/A - No BOM All Parts Sold Separately
52	1	Drain Hose Kit for KAV18, 30 and 45 W/D (Optional Extra)	25-204-20-1105
53	1	32mm Hose Stopper	25-204-10-434 (BEA-CON)
54	1	32 X 800mm Drain Hose	25-204-20-1104 (BEA-CON)
55	1	Elbow for 32 x 800mm Drain Hose	25-204-10-435
56	1	Gasket for Elbow	25-325-10-015
57	1	Plastic Nut for Drain Hose Elbow	25-215-10-047
58	2	Hose Clip KV100	25-215-10-056 (BEA-CON)
59	1	Caution Label for Drain Hose / Dump Valve on KAV18, 30 and 45 W/D	In House Printed Label


^a A/S = Anti-static / Conductive

^a A/S = Anti-static / Conductive


9. EU Declaration of Conformity (Machinery)

EU Declaration of Conformity (Machinery)			
Manufacturer's Name:	Filtermist International Limited	Machinery Covered by this Declaration:	
Full Address:	Telford 54 Business Park, Nedge Hill, Telford, Shropshire, TF3 3AL	Description:	Industrial Vacuum Cleaner
		Function:	To be used in a dust producing workstation environment to remove potentially hazardous dust from surface and the air
		Type:	KAV Series
		Model:	KAV 15, 18, 20, 30 and 45; KAV 15H, 18H, 20H, 30H and 45H; KAV 15W/D, 18W/D, 20W/D, 30W/D, 45W/D
		Serial Number:	See unit
The machinery conforms to all the requirements of the Machinery Directive 2006/42/EC.			
The following standards have been used:		EN12100:2010, EN60204-1:2018, EN ISO 14120:2015, EN ISO 13857:2019	
The technical file is compiled in accordance with Part A of Annex VII of the Machinery Directive 2006/42/EC.			
Person authorised to compile the technical file (based in the European Community):	Name:	Absolent AB	
	Address:	Staplaregatan 1 SE-531 40 Lidköping, Sweden	
The relevant authorised person undertakes to transmit, in response to a reasoned request by the national authorities, relevant information on the machinery. This information will be transmitted by: (email, post)			
Person authorised to make this declaration:	Name:	Craig Haynes	
	Position in company:	Head of Engineering	
	Signature:		
	Place of declaration:	Filtermist Limited, Telford 54 Business Park, Nedge Hill, Telford, Shropshire, TF3 3AL, England	
	Date of declaration:	1st January, 2025	

10. EU Declaration of Conformity (ATEX)


EU Declaration of Conformity (ATEX)		
We Company Name: Filtermist Limited Postal Address: Telford 54 Business Park, Nedge Hill City: Telford Postcode: TF3 3AL Telephone Number: 01952 290500 E-mail address: sales@filtermist.com		
Declare that this DOC is issued under the sold responsibility of the manufacturer. Product: Industrial Vacuum Cleaner Type: KAV Series Batch: N/A Serial Number: See Unit Brand: Kerstar (a subsidiary of Filtermist)		
Object of the declaration To be used in a dust producing workstation environment to remove potentially hazardous dusts from surface and the air		
The object of the declaration described above is in conformity with the relevant Union harmonisation legislation: EMC Directive 2014/30/EC RoHS Directive 2015/863/EU ATEX 2014/34/EU Pressure Equipment Directive (PED) 2014/68/EU		
The following harmonised standards and technical specifications have been applied (title, date of standard/specification): EN12100:2020, EN60204-1:2018, EN ISO 14120:2015, EN ISO 13857:2020		
Additional Information: The relevant authorised person undertakes to transmit, in response to a reasoned request by the national authorities, relevant information on the machinery. This information will be transmitted by: (email, post). Person authorised to compile the technical file, based in the European community is: Absolent AB Address: Staplaregatan 1, SE-531 40 Lidköping, Sweden		
Signed for an on behalf of:		
Place of Issue: Filtermist Limited, Telford 54 Business Park, Nedge Hill, Telford, Shropshire, TF3 3AL, England 2025-01-01	yyyy-mm-dd: 2025-01-01	Name, Function and Signature: Craig Haynes, Head of Engineering 

11. EU Declaration of Conformity (NON-ATEX)

EU Declaration of Conformity (NON-ATEX)		
We Company Name: Filtermist Limited Postal Address: Telford 54 Business Park, Nedge Hill City: Telford Postcode: TF3 3AL Telephone Number: 01952 290500 E-mail address: sales@filtermist.com		
Declare that this DOC is issued under the sold responsibility of the manufacturer. Product: Industrial Vacuum Cleaner Type: KAV Series Batch: N/A Serial Number: See Unit Brand: Kerstar (a subsidiary of Filtermist)		
Object of the declaration To be used in a dust producing workstation environment to remove potentially hazardous dusts from surface and the air		
The object of the declaration described above is in conformity with the relevant Union harmonisation legislation: EMC Directive 2014/30/EC RoHS Directive 2015/863/EU Pressure Equipment Directive (PED) 2014/68/EU		
The following harmonised standards and technical specifications have been applied (title, date of standard/specification): EN12100:2020, EN60204-1:2018, EN ISO 14120:2015, EN ISO 13857:2020		
Additional Information: The relevant authorised person undertakes to transmit, in response to a reasoned request by the national authorities, relevant information on the machinery. This information will be transmitted by: (email, post). Person authorised to compile the technical file, based in the European community is: Absolent AB Address: Staplaregatan 1, SE-531 40 Lidköping, Sweden		
Signed for an on behalf of:		
Place of Issue: Filtermist Limited, Telford 54 Business Park, Nedge Hill, Telford, Shropshire, TF3 3AL, England 2025-01-01	yyyy-mm-dd: 2025-01-01	Name, Function and Signature: Craig Haynes, Head of Engineering 

This page is intentionally left blank.

This page is intentionally left blank.



Protecting the Environment: Disposal

When this product has reached the end of its useful life it must be recycled in an environmentally friendly manner. It must not be disposed of with normal household waste.

This product is likely to contain or be contaminated with dust hazardous to health. It must be thoroughly decontaminated in accordance with best practice before recycling

www.kerstar.com

Kerstar® products are manufactured by Filtermist Limited, based at Telford 54 Business Park, Nedge Hill, Telford, Shropshire, TF3 3AL, England.

(+44) 1952 290500 | sales@filtermist.com | www.filtermist.com

Although every effort has been made to maintain accuracy of information and specifications in this manual, no liability can be accepted for errors and omissions and this manual forms no part of a contract. Filtermist International Limited may introduce modifications and improvements from time to time, and consequently the details given in this manual are subject to alteration without notice.

Supplied by:



Certificate Number 1122
ISO 9001
ISO 14001