

KAV 15-45 & KAV 18-45 W/D

Compressed Air Powered Dry and Wet & Dry Vacuum Cleaners

This range of industrial vacuum cleaners is available in dry pick up only versions or wet & dry versions that can be converted to pick up dry dust and debris or non-flammable and non-corrosive liquids. All models are suitable for Dust Zone 21 & Gas Zone 1. Units are supplied on a stainless steel caddy with braked castors and conductive wheels where applicable and all models are fully earth bonded and have an anti-static (conductive) vacuum and air supply hose. Every vacuum cleaner is individually tested and provided with its own test certificate for earth path continuity. All units are supplied with a complete conductive accessory kit.




KAV 45

FILTRATION

- 1st Stage** Disposable microfibre bag
- 2nd Stage** Anti-static (conductive) cloth filter

Wet & Dry Models are supplied with a Conductive ball type float shut-off assembly.

TYPICAL PERFORMANCE

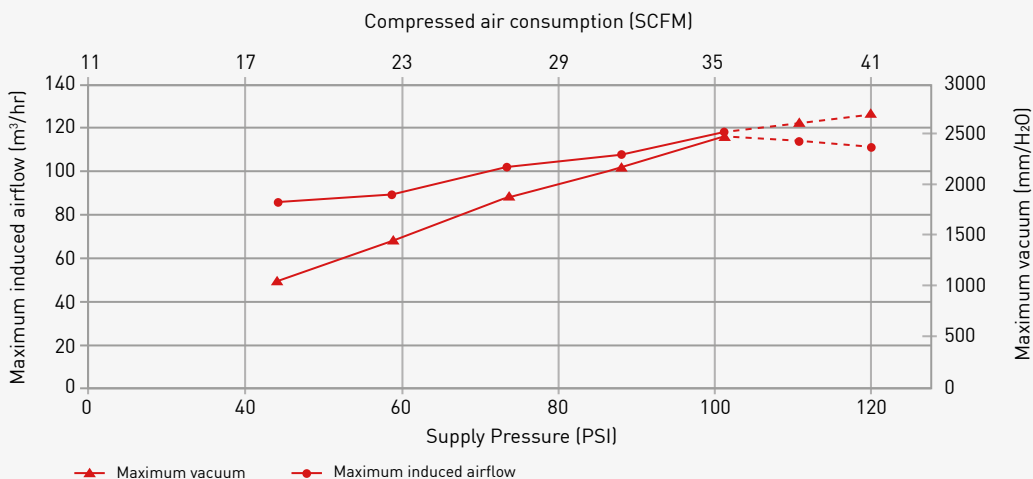

Please note power requirement - Do you have sufficient compressed air to spare?

TECHNICAL SPECIFICATION

| | KAV 15 | KAV 18 | KAV 20 | KAV 30 | KAV 45 |
|---|--|---|--|---|---|
| DIMENSIONS (h x w x d) | 430x380x380mm | 895x410x420mm | 525x440x440mm | 895x460x500mm | 895x460x500mm |
| WEIGHT | 6.5kg | 11.5kg | 9kg | 14.5kg | 15.9kg |
| MOBILITY | 4x75mm Conductive Heavy Duty Castors | 2x75mm Conductive Heavy Duty Castors and 2x200mm Conductive Wheels on a Heavy Duty Tubular Steel Stainless Caddy. Canister detachable from Caddy | 4x75mm Conductive Heavy Duty Castors | 2x75mm Conductive Heavy Duty Castors and 2x200mm Conductive Wheels on a Heavy Duty Tubular Steel Stainless Caddy. Canister detachable from Caddy | 2x75mm Conductive Heavy Duty Castors and 2x200mm Conductive Wheels on a Heavy Duty Tubular Steel Stainless Caddy. Canister detachable from Caddy |
| CLEANING RANGE (from air point) | 16m/52ft | 16m/52ft | 16m/52ft | 16m/52ft | 16m/52ft |

All models are supplied with a certificate of earth path continuity, a 5 metre conductive air supply hose, a 38mm conductive hose and toolkit. All models are also supplied with 5 disposable microfibre bags. Note: It is the end user's responsibility to ensure and maintain a good earth bond at the compressed air connection point.

All Kerstar Airvac's are independently ATEX tested and approved as category 2 (Dust Zone 21/Gas Zone 1)

II 2 D Ex h IIIC T50°C Db

II 2 G Ex h IIC T6 Gb



KAV 15, 18, 20, 30 and 45

www.kerstar.co.uk

sales@filtermist.com +44 (0) 1952 290500

Kerstar products are manufactured by Filtermist International Limited.

